

Features

- Compact single tier BUS bar protection system
- Proven electro mechanical high impedance differential scheme
- Integrated 3 Phase Metrosils
- Integrated multi trip relay
- Optional trip supply supervision
- Pre assembled & wired in 4U high 19" sub rack
- High speed operation
- High sensitivity
- Wide range of settings
- High stability
- Made in Australia

Application

High impedance protection schemes are widely used for the protection of BUS bars, generators, motors & power transformers. BUS bar protection schemes utilizing electro-mechanical high impedance differential relays are often used due to their simplicity, reliability & comparatively low cost. While numeric high impedance differential relays are now available the application of electro mechanical schemes is likely to continue at least in the role of the Y protection scheme where duplicate protection is employed.

The 1M123 system is an integrated protection scheme which overcomes the issue of space constraints on the protection panel & the problem of where & how to mount the Metrosil elements. The provision of at least one high speed multi trip relay is normally required and often a trip supply supervision element.

All of these functions have been incorporated into a single tier, 4U high, 19 inch sub rack frame.

Description

The 1M123 is made up of the following standard elements manufactured by RMS:

- 3 x 2V73 or 2C73 * Single phase high impedance differential relays
- 1 x 2V75 3 phase Metrosil module
- 1 x 2HSM High speed multi trip relay
- 1 x 4M800 4U 19 inch sub rack frame


The specifications, options & ordering codes can be found in the technical bulletins for each of these components. * The 2V73 is a voltage operated device while the 2C73 is current operated.

A special version of the multi trip relay may be specified which incorporates an auxiliary supply supervision element.

The completed protection system is supplied pre assembled & with inter wiring between the components where specified.

Contact an RMS representative for pricing & further technical details.

Also refer to the 1M124 Numeric High Impedance BUS Protection Rack which utilizes a Reyrolle DAD-N protection relay & is intended for the primary X protection function. The 2V68 CT Supervision & Shorting relay is also available.

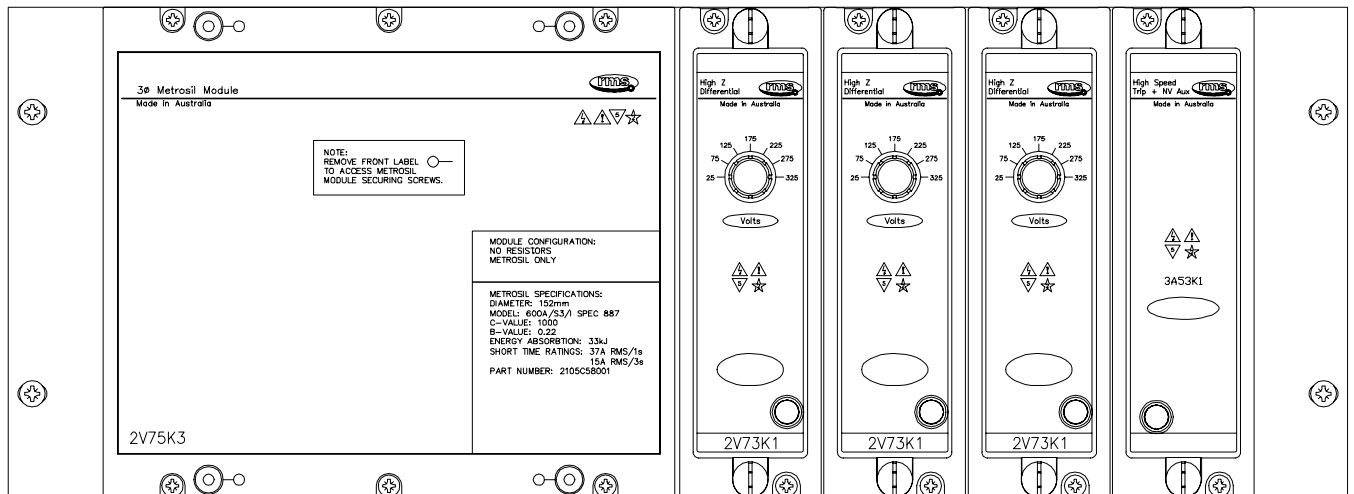

Australian Content

Unless otherwise stated the product(s) quoted are manufactured by RMS at our production facility in Melbourne Australia. Approximately 60% of our sales volume is derived from equipment manufactured in house with a local content close to 90%. Imported components such as semi-conductors are sourced from local suppliers & preference is given for reasonable stock holding to support our build requirements.

Quality Assurance

RMS holds NCSI (NATA Certification Services International), registration number 6869 for the certification of a quality assurance system to AS/NZS ISO9001-2000. Quality plans for all products involve 100% inspection and testing carried out before despatch. Further details on specific test plans, quality policy & procedures may be found in section A4 of the RMS product catalogue.

Product Packaging

Protection relays are supplied in secure individual packing cardboard boxes with moulded styrene inserts suitable for recycling. Each product & packing box is labeled with the product part number, customer name & order details.

Design References

The products & components produced by RMS are based on many years of field experience since Relays Pty Ltd was formed in 1955. A large population of equipment is in service throughout Australia, New Zealand, South Africa & South East Asia attesting to this fact. Specific product & customer reference sites may be provided on application.

Product Warranty

All utility grade protection & auxiliary relay products, unless otherwise stated, are warranted for a period of 24 months from shipment for materials & labour on a return to factory basis. Repair of products damaged through poor application or circumstances outside the product ratings will be carried out at the customer's expense.

Standard Conditions of Sale

Unless otherwise agreed RMS Standard Terms & Conditions (QF 907) shall apply to all sales. These are available on request or from our web site.



Relay Monitoring Systems Pty Ltd

6 Anzed Court, Mulgrave, Victoria 3170, AUSTRALIA

Tel: 61 3 9561 0266 Fax: 61 3 9561 0277 Email: rms@rmspl.com.au Web: www.rmspl.com.au